

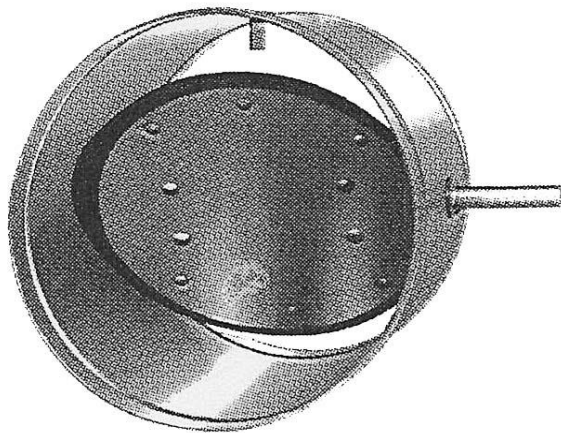


Round Volume Control Damper



Damper is designed for all types of low leakage, round duct applications. Available in sizes of 100mm diameter through 600mm diameter. For diameter exceeding 600mm, contact factory.

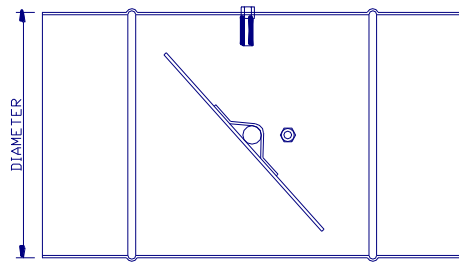

Options

- Construction: Aluminium, 304 and 316 stainless steel are available on requested.
- Seals: Adhesive type seals.
- Manual or electric control options.

Standard Specifications

Max. Face Velocity:	15m/s
Max. Diff. Pressure:	1500Pa
Max Temp.:	120°C
Min. Diameter:	100mm
Max. Diameter:	600mm
Frame:	1.2mm galvanised steel, 200mm deep
Blade:	1.6mm galvanised steel, single thickness.
Axles:	12mm plated steel.
Bearing:	Oilless bronze bearing.
Seals:	Optional.
Stop:	#10-16 bolt with locknut at open and closed.
Finish:	Mill.
Actuator:	An external shaft 6" beyond frame is standard.